





# Flex Integrated

ESP-1280424 | Minimum Radius: 3.625

## General Notes

The kerf cut drawing provides a visual guide, but actual cuts will vary based on the specific job. If you need slightly tighter radii, feel free to ask—we can test it out for you. The minimum miter cut angle between pieces is 15°, and the maximum length of the kerf cut extrusion is 240 inches.

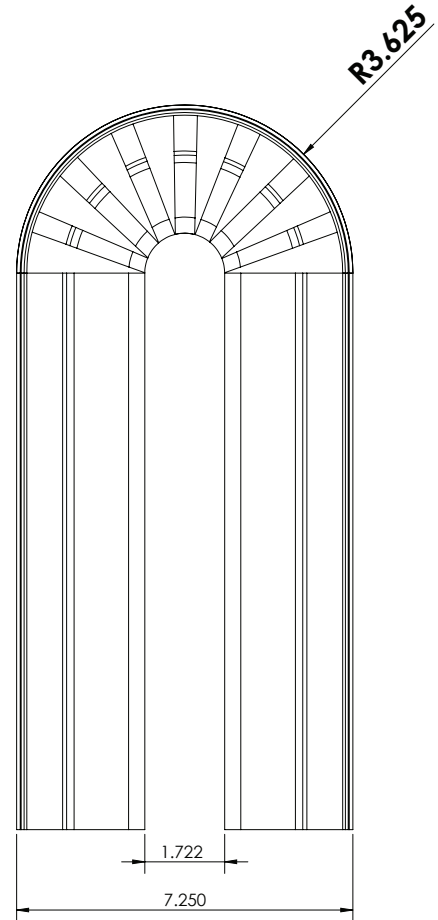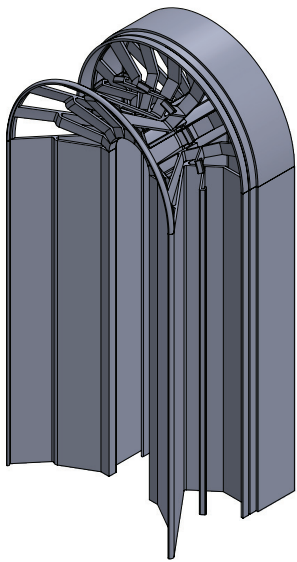


FRONT VIEW

## Minimum Frame Spacing

Due to the nature of certain sign designs, tight areas can be limiting in what extrusion profile can work. When the perimeter of the sign is too close together, scaling up the sign to achieve the dimensions shown to the right will enable the use of each specific product.

\*Ensure LEDs fit in the space between frames if the sign is to be illuminated.

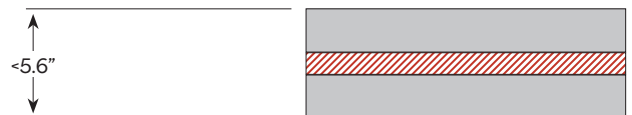

Frames Colliding

## Have Questions?

Toll Free: 1.800.627.9044

Local: 1.913.764.2364

[www.excellart.com](http://www.excellart.com)